

EMERALD TECH

28V/4A, 12V/3A, 5V/2A, 3.3V/2A, 1.2V/4A 160 Watts

Technical Specification

EMV150C12T28

High Efficiency Converter

Up to 160 Watts

Description

The EMV150C12T28 brick DC/DC converters is a high density, high density, wide input voltage range, high reliability multiple output DC/DC converter. The high efficiency DC/DC converters offer a fully enclosed size only is 1.59 X 1.39 X 0.30 inch (40.5 X 35.5 X 8mm) and current levels that exceed all other same size of power converters on the market. With a wide input voltage range of 9-36 VDC, It offer four outputs with 28V, 12V, 5V, 3.3V, 1.2V. The 28V and 12V is for custom output available. The model features input undervoltage lockout, output overvoltage protection, overtemperature protection, output overload protection and multi-function. The fully enclosed, encapsulated construction with aluminum heat spreader design achieves efficient heat transfer with no hot spots. The use of patent-pending hybrid planar transformer technology and other patent-pending design concepts facilitate maximum power delivery with the highest efficiency of up to 85%. The converters combine creative design concepts with highly derated power devices to achieve very high reliability, high performance and low cost solution to systems designers requiring maximum power in small footprints.

Applications

- GPS, Comput notebook, Workstation.
- Distributed Power Architecture
- Data Communications, Telecommunications
- Wireless Communications
- Servers, Switches and Data Storage

- Semiconductor Test Equipment
- Aerospace, Aircraft
- Complex power system
- Portable weaponry

Features

- Wide input voltage range: 9-36V
- 28V, 12V, 5V, 3.3V, 1.2V output models
- 28V and 12V - Custom output available
- Input surge withstand: 50V < 100ms
- Ripple & Noise (20MHz BW) <100 mv (pk-pk) typical
- Remote On/Off control
- Output adjustment +/-10% range
- Output Regulation: +/- 0.2% no load to full load
- Output overcurrent and overvoltage protection
- Over Temperature protection
- Input Under voltage protection
- Power density: 100W/Cubic inch
- Efficiency: 85%
- No minimum load required
- Low profile of only 0.30 inch (8mm).
- -40°C to +85°C ambient operation
- MTBF of 1,000,000 hours @ 50°C (Bellcore))

EMERALD TECH. No.A-3, Xiuzhou High-Tech Industrial Park, Jiaying City, ZJ 314002 China.

Tel.: 86-573-2790696 • Fax: 86-573-2790698 • www.emeraldtech.com • Email: sales@emeraldtech.com • EMV


Part Number and Selection Information

Model Part Number	Input			Output		Efficiency 75% Load (%)
	Voltage (Volts)	Current (A)		Voltage	Current	
	Nominal	No load	Full load	(Volts)	(Amps)	
EMV150C12T28	12	0.18	15.6	1.2、 3.3、 5、 12、 28	4、 2、 2、 2、 4	> 85

Consult factory for other output voltage configurations

Outline Information and Pin-out

Function	Function
Vin +	Positive input voltage
On/Off	TTL input to turn converter on and off, referenced to Vin(-), with internal pull up
Vin -	Negative input voltage
Vout -	Negative output voltage
+1.2V	Positive 1.2V output voltage
+3.3V	Positive 3.3V output voltage
+5V	Positive 5V output voltage
+12V	Positive 12V output voltage
+28V	Positive 28V output voltage

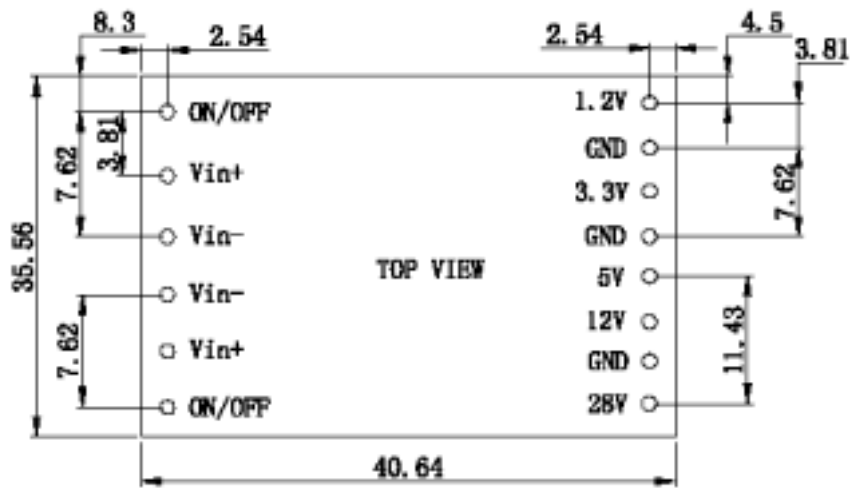

单位:mm

40.5 X 35.5 X 8mm

Notes:

- 1). All dimensions are in inches [mm]
0.039" [1.0mm],
- 2). Pin material: Brass
- 3). Pin finish: Tin/Lead plated
- 4). Baseplate material: Aluminum.
- 5). Outline dimension:
1.59 X 1.39 X 0.30 inch
40.5 X 35.5 X 8mm
- 6). Max. Weight: 15g

Electrical Specification

Typical operating condition at Ta=25°C, Vin=12V unless otherwise noted.

PARAMETER	NOTES	MIN	TYP	MAX	UNIT
Absolute maximum rating					
Input voltage		0		32	V
Output current		-40		100	°C
Operating case temperature		-55		150	°C
Storage temperature				95	%
Input characteristics					
Operating input voltage range		9	12	36	V
Turn on voltage threshold		8.4	8.7	9	V
Turn off voltage threshold		8.1	8.4	8.7	V
Maximum input current	Maximum load, 12Vin		15.6	16.0	A
Off converter input current	12Vin		4.0	5.0	mA
Undervoltage turn-on		8.7			
Undervoltage turn-off				0	mA
Overvoltage turn-off/on				33	mA
Output characteristics					
Output voltage	5V Output	5.00	5.05	5.10	V
	3.3V Output	3.29	3.31	3.33	V
	1.2V Output	1.19	1.21	1.23	V
	12V output (custom output available)	11.90	12.00	12.10	V
	28V output (custom output available)	27.8	28.0	28.2	V
Output current	5V Output	0		2	A
	3.3V Output	0		2	A
	1.2V Output	0		4	A
	12V output (custom output available)	0		2	A
	28V output (custom output available)	0		4	A
Output ripple and noise	5V output, 75% full load, 12Vin, 20Mz bandwidth,		50	100	mV(pk-pk)
	3.3V output, 75% full load, 12Vin, 20Mz bandwidth,		50	80	mV(pk-pk)
	1.2V output, 75% full load, 12Vin, 20Mz bandwidth,		40	70	mV(pk-pk)
	12V output. 75% full load, 12Vin, 20Mz bandwidth, (custom output available)		100	150	mV(pk-pk)
	28V output. 75% full load, 12Vin, 20Mz bandwidth, (custom output available)		160	220	mV(pk-pk)
Output over voltage protection	5V Output	6.0	6.3	6.6	V
	3.3V Output	4.0	4.25	4.5	V
	1.2V Output	1.8	2.0	2.2	V
	12V output (custom output available)	13.8	14.2	14.6	V
	28V output (custom output available)	32	33	34	V
Output over current protection	100% full load	110	120	130	%
Over-temperature protection	At 100°C baseplate temperature	100	105	110	°C
Temperature coefficient				±0.05	%/°C
Capacitive Load	All Output			2,000	μF
Short circuit protection	No Limit				

Output dynamic characteristics					
Startup time	5% 到 95% Output Voltage		20	40	ms
Start up overshoot				200	mV
Transient Peak	Over Voltage (Peak)			300	mV
Transient recovery time	Recover time			250	uS
Efficiency					
Full Load efficiency	24V input, 50W output		>85		%
Operation Environment					
Operating temperature		-55		125	C
Ambient air pressure		Vacuum		Normal	
Humidity				95%	
Mechanical shock & vibration	Per customer specification				
Feature Characteristics					
Switching frequency		340	350	360	KHz
ON/OFF control (Positive logic) Converter On Converter Off		3.0		1.2	V V
Calculated MTBF	Bellcore @ 50°C		1,000,000		Hrs
weight				40	gram

Basic operation and functions

Input Power (Pin Vin+, Vin-)

Input power Vin(+) must be connected to Positive input voltage Pin Vin+; Input power common Vin(-) must be connected to Negative input voltage Pin Vin-.

Output Power (Pin Vo+, Vo-)

Output power Vout(+) must be connected to Positive output voltage Pin +1.2V, +3.3V and +5V; 12V, 28V.
Output power Vout(-) must be connected to Negative output voltage Pin GND

On/Off (Pin On/Off)

Control input pin to control on/off of the converter unit.
Positive logic. On when voltage on this pin is greater than 2.5V and off when below 1.2V.